TREVIK

ARCHITECTURAL OPENING SYSTEMS



PACKAGE A / STANDARD WAREHOUSE

STANDARD WAREHOUSE

A coordinated loading-bay concept for conventional goods receiving and dispatch.

PROJECT-SUPPLY PROGRAMME / 2026 REVIEW EDITION

Illustrative imagery. Product data and compatibility subject to technical verification.

01 / APPLICATION

Designed for the operating brief.

Combine the industrial opening, truck interface, weather protection and operating controls around an actual warehouse brief.



ILLUSTRATIVE APPLICATION PHOTOGRAPHY

WHERE THE SYSTEM FITS

01 Goods receiving

Frequent pallet deliveries and goods movement.

02 Warehouse dispatch

Door and dock provisions for outgoing vehicles.

03 New-build or refurbishment


Existing pits and structural substrates need review.

Conceptual project scope only. Actual manufacturer equipment, operating limits and destination suitability remain to be verified.

02 / SCOPE DEVELOPMENT

Start with the scope. Then verify the interfaces.

The three-bay illustration below is a planning reference, not a construction drawing.

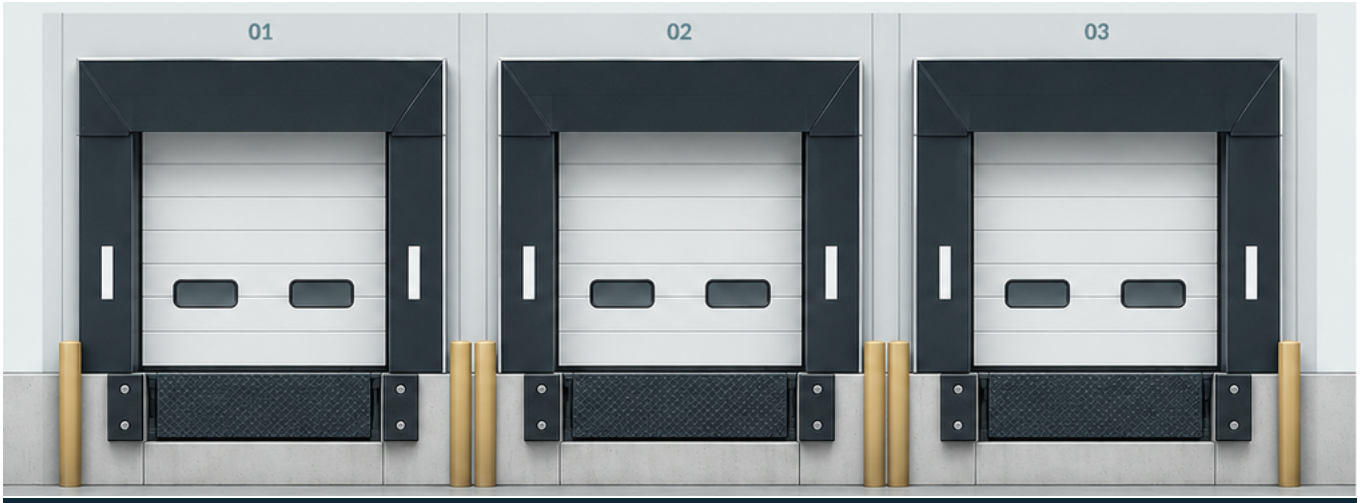

ILLUSTRATIVE ELEVATION / NOT TO SCALE

EQUIPMENT TO REVIEW

- Industrial sectional or suitable roller door
- Dock leveller matched to vehicle and forklift duty
- Dock shelter / seal and impact protection
- Dock signals and safety controls as selected

SELECTION INPUTS

- Opening width, height, track headroom
- Truck and trailer floor heights
- Forklift plus load, wheel/point loading
- Pit, civil geometry and site exposure

Schematic is illustrative only. Pit drawings, loading capacities, wiring and installation must be checked for the selected models.

03 / TECHNICAL RELEASE

Evidence before quotation.

Do not derive performance, warranty or suitability from an illustration or a generic product family.

MANUFACTURER DATA

01 Door drawings and wind-load evidence where applicable

02 Leveller dynamic-load basis and pit drawings

03 Controls, electrical and safety documentation

04 Spare parts, warranty and operating manuals

LOCAL PROJECT WORKS

01 Measured openings and civil dock structure

02 Electrical supply, installation and commissioning

03 Truck movement / forklift safety assessment

04 Destination approvals and operator instruction

PROJECT BRIEF & QUOTATION PATHWAY

Define. Verify. Supply.

Start with country, bay quantity, opening sizes and expected site duty. Drawing and equipment detail follows as the project develops.

apollonzglobal.com/industrial-doors-loading-bays

TREVIK is offered as wholesale / project supply only. Local installation, civil works, electrics and commissioning remain with local project parties.